


Thermostatic Valve T12005

AQUABRASS

/ TURBO thermostatic valve with 5 shut-off valves

Specification sheet

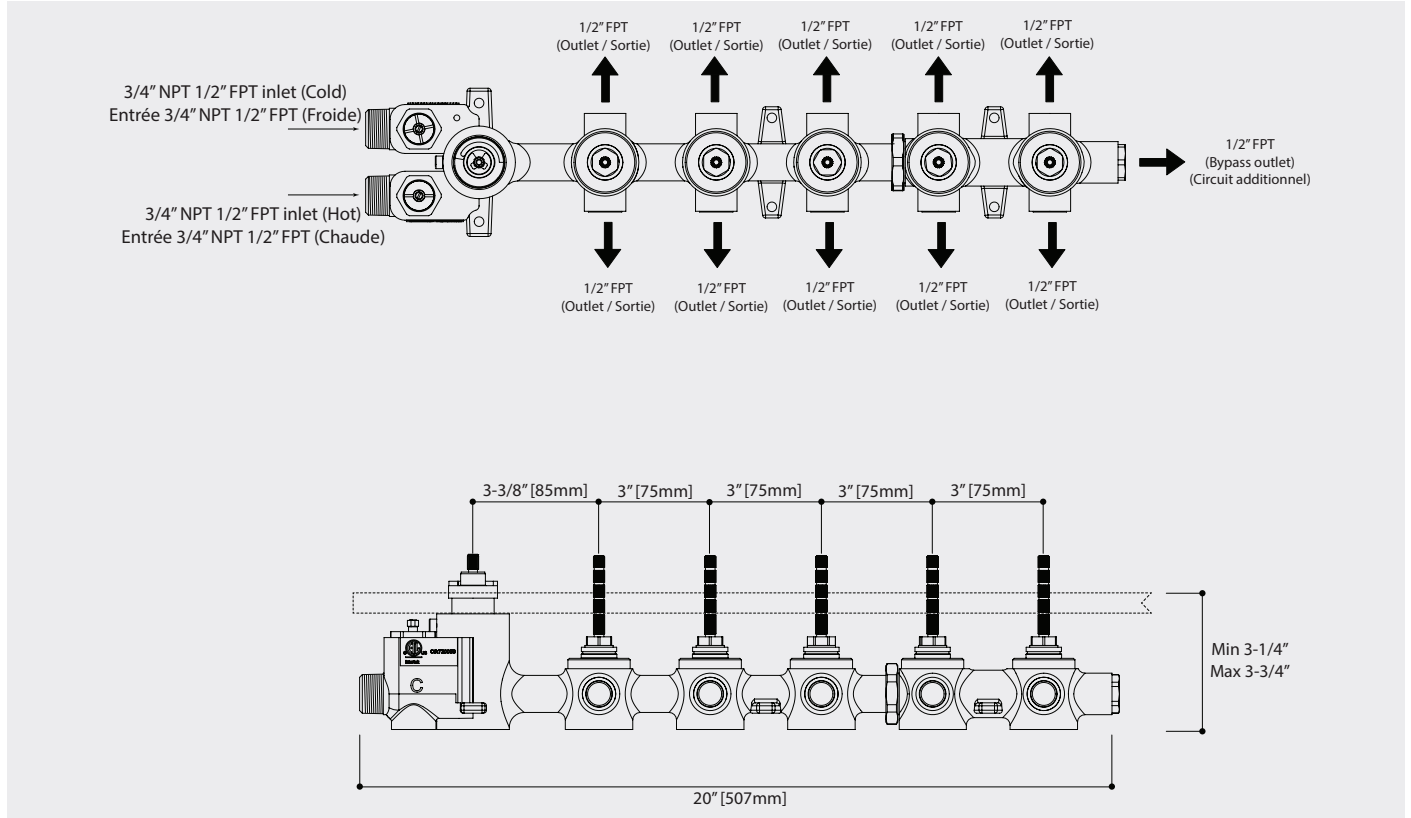

- Features**
- High flow thermostatic cartridge
 - Universal inlets for 3/4" and 1/2" connections (built-in female threads for 1/2" connections and male threads for 3/4" connections)
 - Reversible service check valves with filters and improved stop mechanism
 - Italian made nickel plated solid brass rough and Vernet thermostatic cartridge
 - shut-off valve outlets: connections right, left or both sides simultaneously removable NPT plug at the top for an extra independent shut-off valve (#1206) or diverter with stop (#61934) connection vertical water inlets for a fast and efficient installation
 - Safety temperature stop, preset at 38°C / 100°F

Specs at large - Flow rate: 12 gpm (45 l/min) at 45 psi

Warranty
Residential: Two years warranty
Commercial: Two years warranty
(Complete warranty available at aquabass.com/warranty)

Code & Compliance